



HIGH BAY LIGHT SERIES KUFO

◆ Factories.Steel Mills.Steel Smelting Plants.Farms, sport Facilities&Workshops,Storage Facilities&Warehouses, Supermarkets&Department Stores,Showrooms,Design Centers&Galleries.

100W –200W

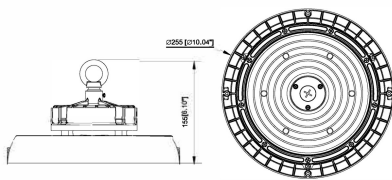

100W/150W

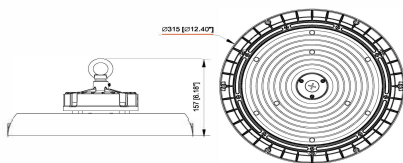

200W



Power 55%+80%+100% adjust


Parameter	Value		
Model	KHBUFO100W	KHBUFO150W	KHBUFO200W
Rate Power	100W	150W	200W
Luminous Flux	19,000lm	28,500lm	38,000lm
Luminous Efficiency	190lm/w		
Color Temperature	CCT 3000K / 4000K / 5000K / 5700K / 6500K		
Color Rendering Index	>70 Ra		
Input Voltage	AC 100-277 V , 50/60Hz		
Power factor	≥ 0.95		
Beam Angle	60° 90° 120°		
Work Temperature	-40°C to +50°C		
Work Life	>50,000 Hours		
IP Rating	IP65		
Net Weight	1.85 Kg		2.20 Kg
Dimensions	255x155 mm		315x157 mm



Installation and use

P1 Mounting Ring (Standard)


1



Power	D1
100W	10mm
150W	10mm
200W	10mm


(Optional)

2

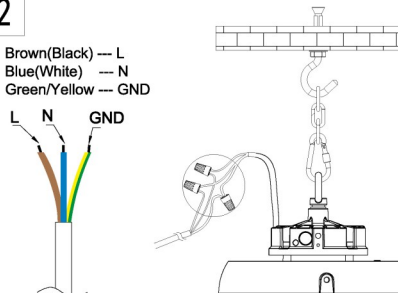


Brown(Black) --- L
Blue(White) --- N
Green/Yellow --- GND

3



P2 Mounting Bracket


1




Power	D1	D2
100W	140mm	12mm
150W	140mm	12mm
200W	180mm	12mm

(Optional)

2



3

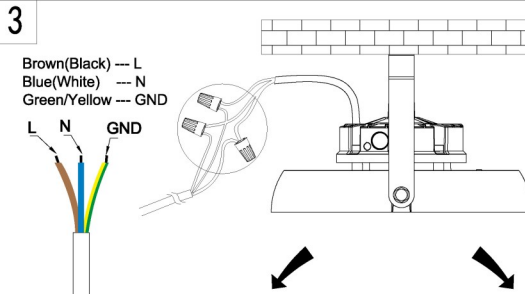

Brown(Black) --- L
Blue(White) --- N
Green/Yellow --- GND

Photometry

