TUBE LIGHT

SERIES KT8H 14W/16W/18W


- **Manufacturing Floor,Warehouse Hospitals,Office Buildings,Car Park,Supermarket,Green Building, Walk-path,ect.**
- **Instaed T8 fluorescent 120 cm.**


14W –18W







Parameter	Value		
Model	KT8H0214W22	KT8H0216W24	KT8H0218W26
Rate Power	14W	16W	18W
Luminous Flux	2,200lm	2,400lm	2,600lm
Luminous Efficiency	>150lm/W	>150lm/W	>144lm/W
Color Temperature	CCT 3000K/4000K/5000K/6500K		
Color Rendering Index	>80 Ra		
Input Voltage	AC 185-260 VAC , 50/60Hz		
Power factor	≥ 0.95		
Beam Angle	180°		
Total harmonic Current	<10%		
Work Temperature	0°C to 45°C		
Work Life	>50,000 Hours		
Surge Protection	1 kVA		
IP Rating	IP33		
Net Weight	205 g		
Dimensions	28.5*1198 mm		





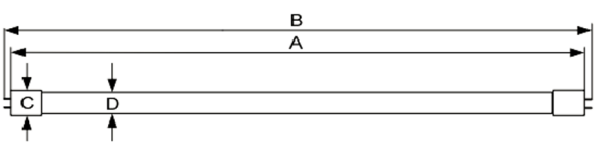

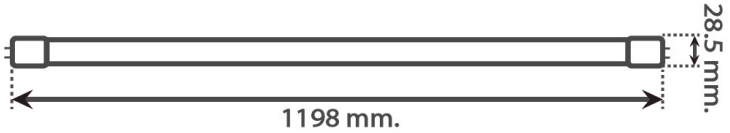

www.kbmlighting.com